

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number
WO 01/90042 A1

(51) International Patent Classification⁷: **C07C 67/055**,
69/15, 51/215, 53/08

(21) International Application Number: PCT/EP00/04543

(22) International Filing Date: 19 May 2000 (19.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **AVENTIS
RESEARCH & TECHNOLOGIES GMBH & CO KG**
[DE/DE]; 65926 Frankfurt am Main (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZEYSS, Sabine**
[DE/DE]; Wiesbadener Strasse 3 B, 61462 Königstein

(DE). **DINGERDISSEN, Uwe** [DE/DE]; Linnéweg
1, 64342 Seeheim-Jugenheim (DE). **FRITCH, John**
[US/US]; 4334 Five Points Rd., Corpus Christi, TX 78410
(US).


(74) Agent: **ACKERMANN, Joachim**; Postfach 11 33 26,
60048 Frankfurt am Main (DE).

(81) Designated States (national): AE, AG, AL, AM, AU, AZ,
BA, BB, BG, BR, BY, CA, CN, CR, CU, CZ, DM, DZ, EE,
GD, GE, HR, HU, ID, IL, IN, IS, JP, KG, KP, KR, KZ, LC,
LK, LR, LT, LV, MA, MD, MG, MK, MN, MX, MZ, NO,
NZ, PL, RO, RU, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
US, UZ, VN, YU, ZA.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: INTEGRATED PROCESS FOR THE PRODUCTION OF VINYL ACETATE

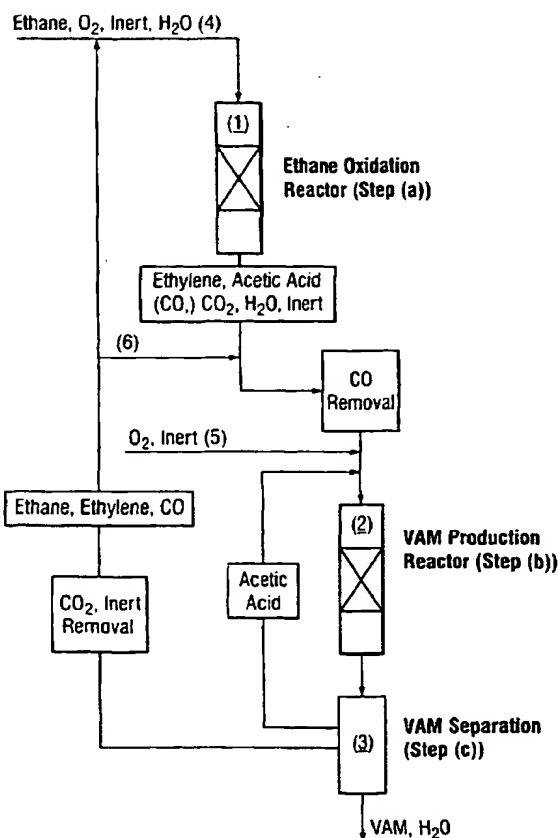

(57) Abstract: The invention describes an integrated process for the production of vinyl acetate which comprises the steps of: (a) contacting in a first reaction zone a gaseous feedstock comprising essentially ethane with a molecular oxygen-containing gas in the presence of a catalyst to produce a first product stream comprising acetic acid and ethylene; (b) contacting in a second reaction zone the first gaseous product stream with a molecular oxygen-containing gas in the presence of a catalyst to produce a second product stream comprising vinyl acetate; (c) separating the product stream from step (b) and recovering vinyl acetate from the product stream from step (b).

WO 01/90042 A1



IL, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report

INTEGRATED PROCESS FOR THE PRODUCTION OF VINYL ACETATE

Description

The present invention relates generally to an integrated process for the production of vinyl acetate and in particular to an integrated process for the production of vinyl acetate from a gaseous feedstock comprising essentially ethane.

Vinyl acetate is generally prepared commercially by contacting acetic acid and ethylene with molecular oxygen in the presence of a catalyst active for the production of vinyl acetate. Suitably, the catalyst may comprise palladium, an alkali metal acetate promoter and an optional co-promoter (for example, gold or cadmium) on a catalyst support. Acetic acid produced by carbonylation generally requires extensive purification to remove inter alia iodides arising from the catalyst system generally employed because iodides are recognised as potential vinyl acetate catalyst poisoners.

Combinations of processes for producing vinyl acetate are known in the art. Thus, WO 98/05620 discloses a process for the production of vinyl acetate and/or acetic acid which process comprises first contacting ethylene and/or ethane with oxygen to produce a first product stream comprising acetic acid, water and ethylene, contacting in a second reaction zone in the presence or absence of additional ethylene and/or acetic acid the first product stream with oxygen to produce a second product stream comprising vinyl acetate, water, acetic acid and optionally ethylene; separating the product stream from the second step by distillation into an overhead azeotrope fraction comprising vinyl acetate and water and a base fraction comprising acetic acid; either recovering acetic acid from the base fraction and optionally recycling the azeotrope fraction or recovering vinyl acetate from the azeotrope fraction. The catalysts suggested in WO 98/05620 for the oxidation of ethylene to acetic acid or ethane to acetic acid are catalysts of the formula



with M being selected from Cd, Au, Zn, Ti, alkali metals and alkaline earth metals; other catalysts for the oxidation of ethane to acetic acid are catalysts of the formula



with M being selected from Co, Cu, Re, Fe, Ni, Nb, Cr, W, U, Ta, Ti, Zr, Zn, Hf, Mn, Pt, Pd, Sn, Sb, Bi, Ce, As, Ag and Au or

catalysts for the oxidation of ethane and/or ethylene to form ethylene and/or acetic

acid which catalysts comprise the elements A, X and Y, wherein A is $\text{Mo}_d\text{Re}_e\text{W}_f$ and wherein X is Cr, Mn, Nb, Ta, V or W and wherein Y is Bi, Ce, Co, Cu, Fe, K, Mg, Ni, P, Pb, Sb, Si, Sn, Ti or U.

Other catalysts for the oxidation of ethane to acetic acid and ethylene suggested in WO 98/05620 are those of the formula



with Z being selected from Li, Na, Be, Mg, Ca, Sr, Ba, Zn, Cd, Hg, Sc, Y, La, Ce, Al, Ti, Zr, Hf, Pb, Nb, Ta, As, Sb, Bi, Cr, W, U, Te, Fe, Co, Ni.

US-A-5,185,308 which is cited in WO 98/05620 describes examples wherein space time yields in the range between 555 and 993 g vinyl acetate per hour per liter catalyst are achieved.

It is an object of the present invention to provide for an integrated process for the production of vinyl acetate from a gaseous feedstock comprising essentially ethane as the only external carbon source of raw material supply, the process exhibiting space/time yields in the range of from 100 to 2000 grams of vinyl acetate per hour per litre of catalyst, preferably 500 to 1500 grams of vinyl acetate per hour per litre of catalyst.

Accordingly the present invention provides an integrated process for the production of vinyl acetate which comprises the steps:

- (a) contacting in a first reaction zone a gaseous feedstock comprising essentially ethane with a molecular oxygen-containing gas in the presence of a catalyst to produce a first product stream comprising acetic acid and ethylene;
- (b) contacting in a second reaction zone the first gaseous product stream with a molecular oxygen-containing gas in the presence of a catalyst to produce a second product stream comprising vinyl acetate;
- (c) separating the product stream from step (b) and recovering vinyl acetate from said product stream from step (b).

The process according to the invention is based on the findings that a certain class of catalysts is capable of converting ethane to a predetermined mixture of acetic acid and ethylene with a very high selectivity and very high space time yield. Such ethylene/acetic acid mixture can be directly fed into a reactor to form vinyl acetate.

Using ethane instead of ethylene as feedstock has the advantage, that it is available in natural gas. In the process of natural gas work-up, several ethane-containing mixtures are obtained, which are usually simply flared off, but which all can be used as carbon feedstock for performing the process of the present invention. Preferably, a mixture with higher amounts of ethane (high purity ethane with ethane content of 90 %, see PERP-Report "Natural Gas Liquids Extraction", 94/95S4, page 60) can be used for the process described in the present invention.

Of specific advantage in the integrated vinyl acetate process of the present invention is that in principle infrastructures, utilities, and other features can be combined, for example only a single feed gas compressor and off-gas scrubbing system is required whereas separate acetic acid and vinyl acetate processes each require their own feed gas compressor and off-gas scrubbing system. By combining step (a) and (b) of the present invention reduced intermediate storage requirements are needed as compared to two separate processes. All these advantages lead to reduced capital and operating costs.

According to the invention a gaseous feedstock comprising essentially ethane is contacted in a first reaction zone with a molecular oxygen-containing gas in the presence of a catalyst active for the oxidation of ethane to acetic acid and ethylene to produce a first product stream comprising acetic acid and ethylene.

The catalyst active for the oxidation of ethane to acetic acid and ethylene may comprise any suitable catalyst as described in DE-A 197 45 902 which is incorporated herein by reference.

These catalysts are of the formula



wherein X and Y have the following meaning:

X is selected from one or more elements of the group consisting of Cr, Mn, Nb, Ta, Ti, V, Te and W;

Y is selected from one or more elements of the group consisting of B, Al, Ga, In, Pt, Zn, Cd, Bi, Ce, Co, Rh, Ir, Cu, Ag, Au, Fe, Ru, Os, K, Rb, Cs, Mg, Ca, Sr, Ba, Nb, Zr, Hf, Ni, P, Pb, Sb, Si, Sn, Tl and U

and wherein a, b, c and d are gram atom ratios and denote

$$a = 1;$$

$$b = 0.0001 - 0.01; \text{ preferably } 0.0001 - 0.005$$

4

$c = 0.4 - 1$; preferably $0.5 - 0.8$ and

$d = 0.005 - 1$; preferably $0.01 - 0.3$.

Preferred catalysts are those wherein X is V and Y is Nb, Sb and Ca. Pd ratios above the indicated gram atom limit favor the formation of carbon dioxide; Pd ratios below the indicated gram atom limit favor the formation of ethylene. A catalyst specifically preferred for the process according to the invention is $\text{Mo}_{1.00}\text{Pd}_{0.00075}\text{V}_{0.55}\text{Nb}_{0.09}\text{Sb}_{0.01}\text{Ca}_{0.01}$.

It is an advantage of the present invention that the ratio of selectivity to acetic acid to selectivity to ethylene which is formed in the first reaction zone can be varied within wide ranges, i.e. from 0 to 95 % each by changing reaction parameters such as reaction temperature, total pressure, feed composition, residence time.

The catalyst active for the oxidation of ethane may be used supported or unsupported. Examples of suitable supports include silica, diatomaceous earth, montmorillonite, alumina, silica alumina, zirconia, titania, silicon carbide, activated carbon, and mixtures thereof. The catalyst active for the oxidation of ethane may be used in the form of a fixed or fluidised bed.

The molecular oxygen-containing gas used in reaction zones may be air or a gas richer or poorer in molecular oxygen than air. A suitable gas may be, for example oxygen diluted with a suitable diluent, for example nitrogen or carbon dioxide. Preferably, the molecular oxygen-containing gas is fed to the first reaction zone independently from the ethane feedstock.

The ethane feedstock of the process of the present invention may be substantially pure or slightly diluted with other gases like the ones being generated by natural gas separation, i.e. e.g. 90 wt.% (PERP-Report "Natural Gas Liquids Extraction 94/95S4, page 60"), or may be admixtures with one or more of nitrogen, carbon dioxide, hydrogen, and low levels of C3/C4 alkenes/alkanes. Catalyst poisons like sulphur should be excluded. Likewise is it advantageous to minimise the amount of acetylene. The amount of inert components is only limited by economics.

Step (a) of the process of the present invention may suitably be carried out by passing ethane, the molecular oxygen-containing gas, steam and (if necessary) additional inerts through the catalyst. The amount of steam may suitably be in the range from 0 to 50 Vol%. The molar ratio of ethane to oxygen may suitably be in the

range between 1:1 and 10:1, preferably between 2:1 and 8:1.

Step (a) of the process of the present invention may suitably be carried out at a temperature from 200 to 500 °C, preferably from 200 to 400 °C.

Step (a) of the process of the present invention may suitably be carried out at atmospheric or superatmospheric pressure, for example in the range from 1 to 100 bar, preferably from 1 to 50 bar.

Typically, ethane conversions in the range of 10 to 100 %, especially 10 to 40 %, may be achieved in step (a) of the process of the present invention, depending on the reactor concept of step (a) which can also be a reactor cascade with interstitial oxygen feed.

Typically, oxygen conversions in the range 90 to 100 % may be achieved in step (a) of the process of the present invention.

In step (a) of the process of the present invention, the catalyst suitably has a productivity space time yield (STY) in the range 100 to 2000 grams of acetic acid/ethylene per hour per litre of catalyst, preferably in the range 100 to 1500 grams of acetic acid/ethylene per hour per litre of catalyst.

The ethylene/acetic acid ratio which is necessary for feeding the vinyl acetate reactor (step (b) of the present invention) may be suitably be adjusted by changing the reaction parameters of step (a), e.g. reaction temperature, total pressure, gaseous hourly space velocity, partial pressures of each reactant, and especially by varying the steam partial pressure in the feed of step (a).

Step (a) of the present invention can be carried out in fixed bed as well as in fluidised bed reactor.

The gaseous product stream from step (a) comprises acetic acid and ethylene in a predetermined ratio and water, and may contain ethane, oxygen, nitrogen and the by-products, carbon monoxide and carbon dioxide. Usually, no or very small amounts (< 100 ppm) of carbon monoxide are produced during step (a). In case that carbon monoxide is produced in higher amounts up to 5 %, it may if necessary be removed after step (a), e.g. by adsorption or by combustion to carbon dioxide by a molecular oxygen-containing gas. Ethylene is present in the gaseous product

stream of step (a) preferably in an amount as is required for direct conversion to vinyl acetate.

The gaseous product from step (a) may be fed directly to the second reaction zone of step (b) together with optionally additional molecular oxygen-containing gas, optionally additional ethylene and optionally additional acetic acid, which can preferably be taken from step (c), the vinyl acetate separation.

The catalyst active for the production of vinyl acetate which is used in step (b) of the process of the present invention may comprise any suitable catalyst known in the art, for example, as described in EP-A 330 853, GB 1 559 540, US 5,185,308, and WO 99/08791.

EP-A 0 330 853 describes catalysts for the production of vinyl acetate all-throughout impregnated containing Pd, K, Mn and Cd as additional promotor instead of Au.

GB 1 559 540 describes a catalyst active for the preparation of vinyl acetate by the reaction of ethylene, acetic acid and oxygen, the catalyst consisting essentially of:

- (1) a catalyst support having a particle diameter of from 3 to 7 mm and a pore volume of from 0,2 to 1,5 ml/g, a 10% by weight water suspension of the catalyst support having a pH from 3.0 to 9.0,
- (2) a palladium-gold alloy distributed in a surface layer of the catalyst support, the surface layer extending less than 0,5 mm from the surface of the support, the palladium in the alloy being present in an amount of from 1,5 to 5,0 grams per litre of catalyst, and the gold being present in an amount of from 0,5 to 2,25 grams per litre of catalyst, and
- (3) from 5 to 60 grams per litre of catalyst of alkali metal acetate.

US 5,185,308 describes a shell impregnated catalyst active for the production of vinyl acetate from ethylene, acetic acid and an oxygen containing gas, the catalyst consisting essentially of:

- (1) a catalyst support having a particle diameter from about 3 to about 7 mm and a pore volume of 0,2 to 1,5 ml per gram,
- (2) palladium and gold distributed in the outermost 1,0 mm thick layer of the catalyst support particles, and
- (3) from about 3,5 to about 9,5% by weight of potassium acetate wherein the gold to palladium weight ratio in said catalyst is in the range 0,6 to 1,25.

WO 99/08791 describes a method for producing catalysts containing metal nano-particles on a porous support, especially for gas phase oxidation of ethylene and acetic acid to form vinyl acetate. The invention relates to a method for producing a catalyst containing one or several metals from the group of metals comprising the sub-groups Ib and VIIIb of the periodic table on porous support particles, characterised by a first step in which one or several precursors from the group of compounds of metals from sub-groups Ib and VIIIb of the periodic table is or are applied to a porous support, and a second step in which the porous, preferably nanoporous support to which at least one precursor has been applied is treated with at least one reduction agent, to obtain the metal nanoparticles produced in situ in the pores of said support.

Typically, step (b) of the process of the present invention is carried out heterogeneously with the reactants being present in the gas phase.

The ethylene reactant used in step (b) of the process of the present invention is produced in step (a) of the process.

The molecular oxygen-containing gas used in step (b) of the process of the present invention may comprise unreacted molecular oxygen-containing gas from step (a) and/or additional molecular oxygen-containing gas. Preferably, at least some of the molecular oxygen-containing gas is fed independently to the second reaction zone from the acetic acid and ethylene reactants.

Step (b) of the process of the present invention may suitably be carried out at a temperature in the range from 140 to 220 °C.

Step (b) of the process of the present invention may suitably be carried out at a pressure in the range from 1 to 100 bar.

Step (b) can be carried out in any suitable reactor design capable of removing the heat of reaction in an appropriate way; preferred technical solutions are fixed or fluidised bed reactors.

Acetic acid conversions in the range 5 to 50% may be achieved in step (b) of the process of the present invention.

Oxygen conversions in the range 20 to 100 % may be achieved in step (b) of the

present invention.

In step (b) of the process of the present invention, the catalyst suitably has a productivity (STY) in the range 100 to 2000 grams of vinyl acetate per hour per litre of catalyst, but >10000 grams of vinyl acetate per hour per litre of catalyst is also suitable.

The second product stream from step (b) of the process comprises vinyl acetate and water and optionally also unreacted acetic acid, ethylene, ethane, nitrogen, carbon monoxide, carbon dioxide and possibly present traces of other byproducts. Intermediate between step (b) and step (c) of the process of the invention it is preferred to remove ethylene, and ethane, carbon monoxide and carbon dioxide, if any, from the second product stream, suitably as an overhead gaseous fraction from a scrubbing column, in which a liquid fraction comprising vinyl acetate, water and acetic acid is removed from the base.

The second product stream from step (b) comprising vinyl acetate, water and acetic acid, with or without the intermediate scrubbing step, is separated in step (c) by distillation into an overhead azeotrope fraction comprising vinyl acetate and water and a base fraction comprising acetic acid.

Vinyl acetate is recovered from the azeotrope fraction separated in step (c), suitably for example by decantation. The recovered vinyl acetate may, if desired, be further purified in known manner. The base fraction comprising acetic acid separated in step (c) is preferably recycled, with or preferably without further purification, to step (b) of the process.

The overall Space Time Yield (STY) of vinyl acetate (referred to ethane) produced in the process is in the range of 100 to 5000, preferably in the range of 500 to 1500 grams of vinyl acetate per hour per litre of catalyst.

The overall yield may be adjusted in a number of ways including independently adjusting the reactant ratios and/or reaction conditions of step (a) and/or step (b) of the process, for example by independently adjusting the oxygen concentration(s) and/or the reaction temperatures and pressures.

The process of the present invention will now be illustrated by example with reference to Figure 1 which represents in schematic form apparatus for use in the

process of the present invention.

The apparatus comprises a first reaction zone (1), a second reaction zone (2) and a scrubber column (3).

In use, a molecular oxygen-containing gas, optionally steam and a gaseous feedstock comprising essentially ethane (4) are fed to the first reaction zone (1) which contains a catalyst active for the oxidation of ethane to form acetic acid and ethylene. Depending on the scale of the process, the first reaction zone (1) may comprise either a single reactor or several reactors in parallel or series. The first reaction zone may also comprise a reactor cascade, wherein between the individual reactors additional molecular oxygen-containing gas can be fed. A first gaseous product stream comprising acetic acid, ethylene, unreacted feedstock, optionally unconsumed molecular oxygen-containing gas and water together with carbon monoxide, carbon dioxide, and inerts is withdrawn from the first reaction zone (1) and is fed to the second reaction zone (2). Additional molecular oxygen-containing gas (5) and/or ethylene (6) may be mixed with the product stream withdrawn from the first reaction zone (1). In the second reaction zone (2) acetic acid and ethylene are contacted with molecular oxygen-containing gas in the presence of a catalyst active for the production of vinyl acetate. Depending on the scale of the process, the second reaction zone (2) may comprise either a single reactor or several reactors in parallel or in series. A product stream comprising vinyl acetate, water, optionally ethane, gaseous by-products and unreacted acetic acid and ethylene is withdrawn from the second reaction zone (2) and is fed to the scrubber column (3) where a gaseous stream comprising ethylene, and optionally ethane together with inerts, carbon monoxide and carbon dioxide by-products is withdrawn overhead and is recycled to the first reaction zone (1). A liquid stream comprising vinyl acetate, water, unreacted acetic acid and possibly present high boiling products of the process are withdrawn from the base of the scrubber column (3) and vinyl acetate is isolated in state of the art equipment not shown. For example it is fed to a distillation column where vinyl acetate and water is removed as an azeotrope and acetic acid, and the possibly present high boiling products are removed as a bleed from the base of the distillation column. The water in the overhead stream from the distillation column can be separated from the vinyl acetate in a decanter and a vinyl acetate product stream removed from decanter is purified by conventional means known in the art.

Carbon dioxide by-product can be removed by any viable technical process known in the art e.g. by reversible absorption in an aqueous K_2CO_3 solution which is

regenerated in a desorption column (not shown).

The invention is illustrated in the following examples.

Examples

Preparation of Catalysts

Example (1)

Preparation of catalysts ($\text{Mo}_{1.00}\text{Pd}_{0.00075}\text{V}_{0.55}\text{Nb}_{0.09}\text{Sb}_{0.01}\text{Ca}_{0.01}\text{O}_x$)

- Solution 1 80 g ammonium molybdate (Riedel-de Haen) in 400 ml water.
- Solution 2 29.4 g ammonium metavanadate (Riedel-de Haen) in 400 ml water.
- Solution 3 19.01 g niobium ammonium oxalate (H. C. Starck)
1.92 g antimony oxalate (Pfaltz & Bauer), and
1.34 g calcium nitrate (Riedel-de Haen) in 200 ml water.
- Solution 4 0.078 g palladium(II)acetate (Aldrich) in 200 ml ethanol.

Solutions 1, 2 and 3 were stirred separately at 70°C for 15 minutes. Then, solution 3 was poured into solution 2, and stirred together at 70°C for another 15 minutes before adding this into solution 1. Thereafter, solution 4 was added.

The resulting mixture was evaporated to obtain a remaining total volume of 800 ml. This mixture was spray-dried at 180°C followed by drying the powder in static air at 120°C for 2 hours and calcining at 300°C for 5 hours. The resulting catalyst I was then pressed, broken and sieved into a granular fraction between 0.35 and 0.70 mm.

Example (2)

Preparation of catalyst II: $\text{K}, \text{Pd}, \text{Au} / \text{TiO}_2$

2.11 g palladium acetate (Aldrich) and 1.32 g gold acetate were dissolved in 30 ml acetic acid. The preparation of the employed gold acetate is described e.g. in US-A-4,933,204. 100 ml TiO_2 support (P25 pellets, Degussa, Hanau) were added to the palladium and gold acetate solution. Then, the majority of acetic acid was evaporated using a rotary evaporator at 70 °C, followed by evaporating the rest using an oil pump at 60 °C and finally in a vacuum drying cabinet at 60 °C for 14 h.

The resulting pellets were reduced with a gas mixture of 10 vol% hydrogen in nitrogen, while passing the gas (40 l/h) directly through the pellets at 500 °C and 1 bar for 1 h. For loading with potassium ions, the reduced pellets were added to a solution containing 4 g potassium acetate in 30 ml of water, for 15 minutes in a mixing apparatus.

Then, the solvent was evaporated using a rotary evaporator. The pellets were dried at 100 °C for 14 h.

Catalyst II was prepared in three batches using the same process; they are called II a, II b and II c, respectively.

Catalytic Tests

For performing the catalytic reaction described in steps (a) and (b) of the present invention, double-wall fixed bed reactors with an inner diameter of 14 mm and 20 mm, respectively, and a length of 350 mm were used. The reactor was heated via the external tube with an oil bath. Typically, 5 ml and 15 ml of catalyst, respectively, partially mixed with some inert material, e.g. typically glass, quartz or alumina granules or beads in a catalyst to inert material volume ratio of e.g. 2:1, 1:1, 1:2, 1:5. To decrease the dead volume of the reactor, it was filled up with inert material (as mentioned above) before and after the catalyst bed. The volume flows were typically adjusted by mass and liquid flow controllers, respectively.

The analysis of reaction products was performed by on-line gas chromatography.

The results of catalytic measurements on catalyst I (example (1)) for performing step (a) of the present invention using one single reactor are shown in Table 1. To be able to compare the results easily, such measurements which were performed at the same total pressure (15 bar), are described.

Data in Table 1 are defined as follows:

Conversion of ethane [%] =

$$(0.5 * [\text{CO}] + 0.5 * [\text{CO}_2] + [\text{C}_2\text{H}_4] + [\text{CH}_3\text{COOH}]) / (0.5 * [\text{CO}] + 0.5 * [\text{CO}_2] + [\text{C}_2\text{H}_4] + [\text{C}_2\text{H}_6] + [\text{CH}_3\text{COOH}]) * 100$$

Selectivity to ethylene [%] =

$$([\text{C}_2\text{H}_4]) / (0.5 * [\text{CO}] + 0.5 * [\text{CO}_2] + [\text{C}_2\text{H}_4] + [\text{CH}_3\text{COOH}]) * 100$$

Selectivity to acetic acid [%] =

$$([CH_3COOH]) / (0.5 * [CO] + 0.5 * [CO_2] + [C_2H_4] + [CH_3COOH]) * 100$$

with

[] = concentration in mol%

[C₂H₆] = concentration of ethane not converted

τ [s] = catalyst volume (ml) / volume flow of the gas (ml/s) at reaction conditions

STY = g product / (l catalyst * h)

Table 1

Catalytic results on Catalyst I performing the ethane oxidation to ethylene and acetic acid

Reaction Conditions							Results					
No	T [°C]	τ [s]	Feed Composition				Con- version X(C ₂ H ₆) [%]	Selectivity			Space Yield STY (HOAc) [g/(hl)]	Time STY (C ₂ H ₄) [g/(hl)]
			V(C ₂ H ₆) [ml/s]	V(O ₂) [ml/s]	V(N ₂) [ml/s]	V(H ₂ O) [ml/h]		S (HOAc) [%]	S (C ₂ H ₄) [%]	S (CO +CO ₂) [%]		
1	280	14.8	1.0	0.2	0.8	1.4	13.3	91.5	0.7	7.8	235	1
2	280	7.4	2.0	0.4	1.6	2.9	10.5	90.4	3.5	6.0	362	7
3	300	7.1	2.0	0.4	1.6	2.9	13.2	89.0	2.0	9.0	447	5
4	300	4.8	3.0	0.6	2.4	4.3	11.3	87.2	5.5	7.3	564	17
5	300	4.1	3.5	0.7	2.8	5.0	10.2	86.2	7.4	6.4	584	24
6	300	3.7	4.0	0.8	3.2	5.0	9.9	84.1	9.2	6.6	630	33
7	300	2.6	6.0	1.2	4.8	5.0	7.7	60.4	35.4	4.3	532	147
8	320	3.5	4.0	0.8	3.2	5.0	13.5	65.2	28.0	6.8	672	136
9	320	2.5	6.0	1.2	4.8	5.0	14.4	38.7	57.1	4.1	638	447
10	340	3.4	4.0	0.8	3.2	5.0	17.9	44.3	49.8	5.9	604	322
11	340	2.4	6.0	1.2	4.8	5.0	18.2	36.2	59.0	4.8	754	582

Table 1 shows clearly that the desired ethylene/acetic acid ratios in the product mixture of step (a) of the present invention can be adjusted easily by varying the different reaction parameters.

Catalyst II (example (2)) was used in step (b) of the present invention for the production of vinyl acetate. The catalytic test was performed at reaction temperatures in the range from 150 to 170 °C, at reaction pressures from 8 to 9 bar.

The results of catalytic measurements on catalyst II (example (2)) for performing step (b) of the present invention are shown in Table 2.

Data in Table 2 are defined as follows:

$$\text{Selectivity to vinyl acetate (VAM) [\%]} = \frac{[\text{VAM}]}{[\text{VAM}] + 0.5 * [\text{CO}] + 0.5 * [\text{CO}_2]} * 100$$

with

[] = concentration in mol%

STY = g product / (l catalyst * h)

Table 2

Catalytic results on Catalyst II performing the vinyl acetate synthesis

No.	Reaction Conditions		Results	
	T [°C]	p [bar]	Selectivity S (VAM) [%]	Space Time Yield STY [g/(hl)]
A	155	9	98	1000
A	160	9	98	1050
A	170	9	96	1000
B	160	9	98	1150
B	170	9	97	700
C	170	9	98	1300

Claims

1. An integrated process for the production of vinyl acetate which comprises the steps of:
 - a) contacting in a first reaction zone a gaseous feedstock comprising essentially ethane with a molecular oxygen-containing gas in the presence of a catalyst to produce a first product stream comprising acetic acid and ethylene;
 - b) contacting in a second reaction zone the first gaseous product stream with a molecular oxygen-containing gas in the presence of a catalyst to produce a second product stream comprising vinyl acetate;
 - c) separating the product stream from step (b) and recovering vinyl acetate from the product stream from step (b).
2. The process according to claim 1 wherein the gaseous feedstock for step (a) comprises ethane, molecular oxygen-containing gas with an ethane to oxygen ratio in the range between 1:1 and 10:1, and 0 to 50 Vol% steam (based on the total volume of the gaseous feedstock).
3. The process according to claim 1 or 2 wherein the ratio of selectivity to ethylene to selectivity to acetic acid in the first product stream is from 0:95 to 95:0.
4. The process according to any one of claims 1 to 3 wherein the catalyst in the first reaction zone is of the formula



wherein X and Y have the following meaning:

X is selected from one or more elements of the group consisting of Cr, Mn, Nb, Ta, Ti, V, Te and W;

Y is selected from one or more elements of the group consisting of B, Al, Ga, In, Pt, Zn, Cd, Bi, Ce, Co, Rh, Ir, Cu, Ag, Au, Fe, Ru, Os, K, Rb, Cs, Mg, Ca, Sr, Ba, Nb, Zr, Hf, Ni, P, Pb, Sb, Si, Sn, Tl and U

and wherein a, b, c and d are gram atom ratios and denote

$$a = 1;$$


$$b = 0.0001 - 0.01; \text{ preferably } 0.0001 - 0.005$$

$$c = 0.4 - 1; \text{ preferably } 0.5 - 0.8 \text{ and}$$

$$d = 0.005 - 1; \text{ preferably } 0.01 - 0.3.$$

5. The process according to any one of the preceding claims wherein additional ethylene and/or acetic acid is fed to the second reaction zone.
6. The process according to any one of the preceding claims wherein the molecular oxygen-containing gas is fed to the first reaction zone independently from the ethane feedstock.
7. The process according to any one of the preceding claims wherein the molecular oxygen-containing gas is fed independently to the second reaction zone from the acetic acid and ethylene reactants.

1 / 1

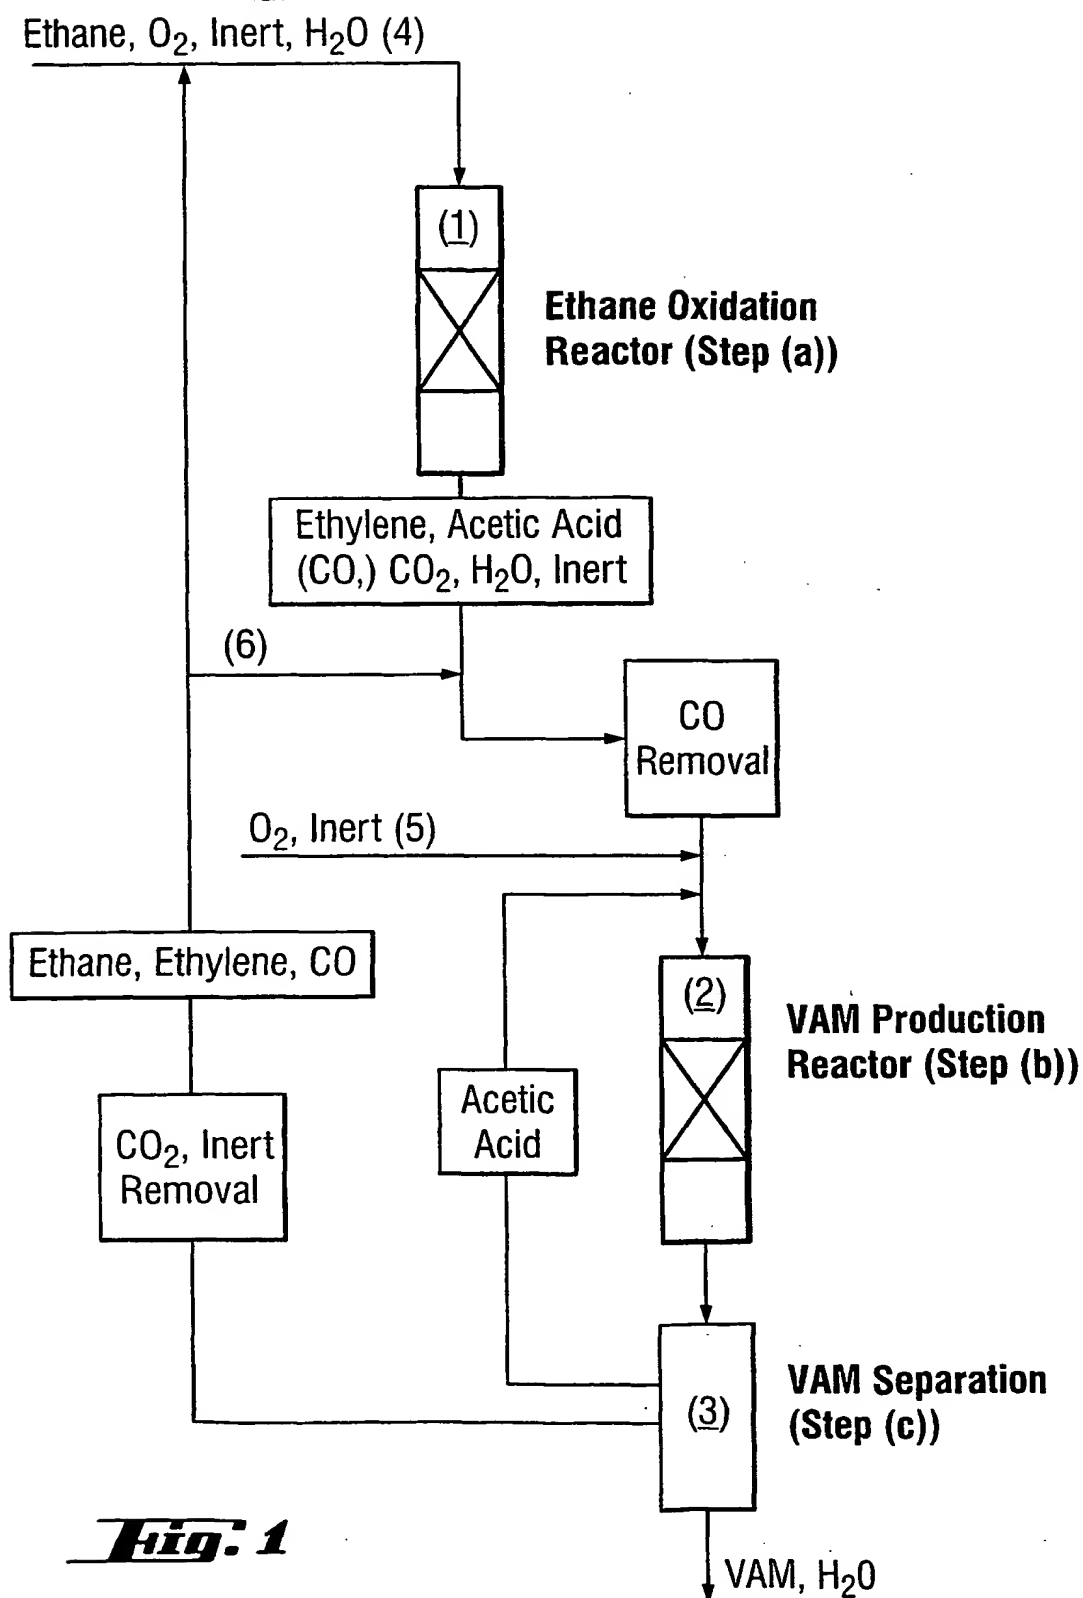**Fig. 1**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/04543

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C07C67/055 C07C69/15 C07C51/215 C07C53/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 05620 A (BP CHEMICALS LTD) 12 February 1998 (1998-02-12) cited in the application page 8, line 13 - line 16 page 9, line 8 - line 20 page 14 -page 16; claims figure 1	1-3,5-7
X	DE 197 45 902 A (HOECHST AG) 22 April 1999 (1999-04-22) page 3, line 68 -page 4, line 19 page 7; table 1 page 8; claims	1-4,6

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

15 January 2001

Date of mailing of the international search report

23/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kinzinger, J

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 00/04543

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9805620 A	12-02-1998	AU 3778997 A	25-02-1998
		BR 9706542 A	20-07-1999
		CA 2232185 A	12-02-1998
		CN 1198732 A	11-11-1998
		EP 0877727 A	18-11-1998
		JP 11514675 T	14-12-1999
		NO 981223 A	18-03-1998
		US 6040474 A	21-03-2000
DE 19745902 A	22-04-1999	CN 1275971 T	06-12-2000
		WO 9920592 A	29-04-1999
		EP 1025075 A	09-08-2000
		NO 20001947 A	29-05-2000